


## Dome Enclosure DOME-144

The dome enclosure is suitable for protecting fibre cable splices in branching applications. Its well-engineered injection moulded outer body make it impenetrable to the elements. It can protect splices and ensure reliability and usage in ambient temperatures from -40°C to +65 °C. It can be placed in aerial, wall mounting, and duct mounting locations.

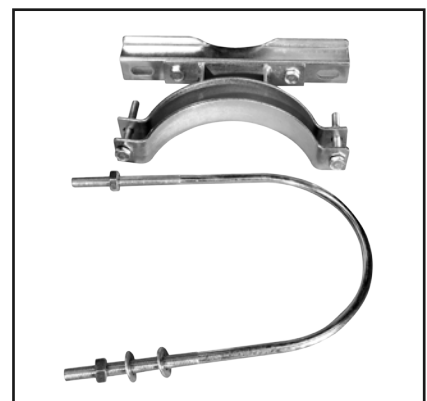

- ▶ Holds up to 144 fibres.
- ▶ Easy to re-enter.
- ▶ Cable entry/exit, 1 oval and 4 round.
- ▶ Integrated pressure valve.
- ▶ Termination and splice kit included.
- ▶ Integrated seal, air tight and water proof.
- ▶ Ideal for cable repair.
- ▶ RoHS compliant.
- ▶ Can be used in through, branch or mid span splice locations.
- ▶ Suitable for aerial, underground duct or direct burial applications.

### Specification

Width: 223mm

Height: 450mm

Weight: 2.26kgs

Cable entry/exit: 1 oval and 4 round.