



# Multi task touch module One OTDR

AQ7280 Series  
Optical Time Domain Reflectometer



In 2002, Yokogawa became a leading supplier of optical test and measurement solutions following the acquisition of Ando Electric. Today, with over 35 years of experience in optoelectronic technology and real world lab and field testing, Yokogawa is justifiably qualified to deliver field test equipment solutions with the world renowned quality and exceptional performance expected from an industry pioneer.

Responding to the growing needs for reliable and ease-of-use field test instruments for installation and maintenance of fiber optic networks, Yokogawa AQ7280 Optical Time Domain Reflectometer (OTDR) is designed to empower field technicians to make fast and precise measurements with confidence.

The AQ7280 satisfies a broad range of test and measurement needs in analyzing optical networks from access to core.

The AQ7280 OTDR delivers:

**RELIABILITY** – Robust design for operating under harsh field conditions. Proven operating system assuring stability, prompt response, and superior protection against software virus attacks.


**EASE-OF-USE** – Dual operation mode by multi-touch touchscreen and hard-key buttons. Fully automatic measurement and easy-to-read analysis reports through new software applications.

**SPEED** – Lightning startup time. Multi-tasking operation to enhance productivity. Immediate reporting via wireless connectivity.



## 35+ years of OTDR expertise

- 1915 **YOKOGAWA** founded
- 1933 **ANDO** founded
- 1981 First OTDR **AQ-1702** 
- 2002 Yokogawa acquired ANDO
- 2010 Compact OTDR **AQ1200** 
- 2014 Latest OTDR **AQ7280** 

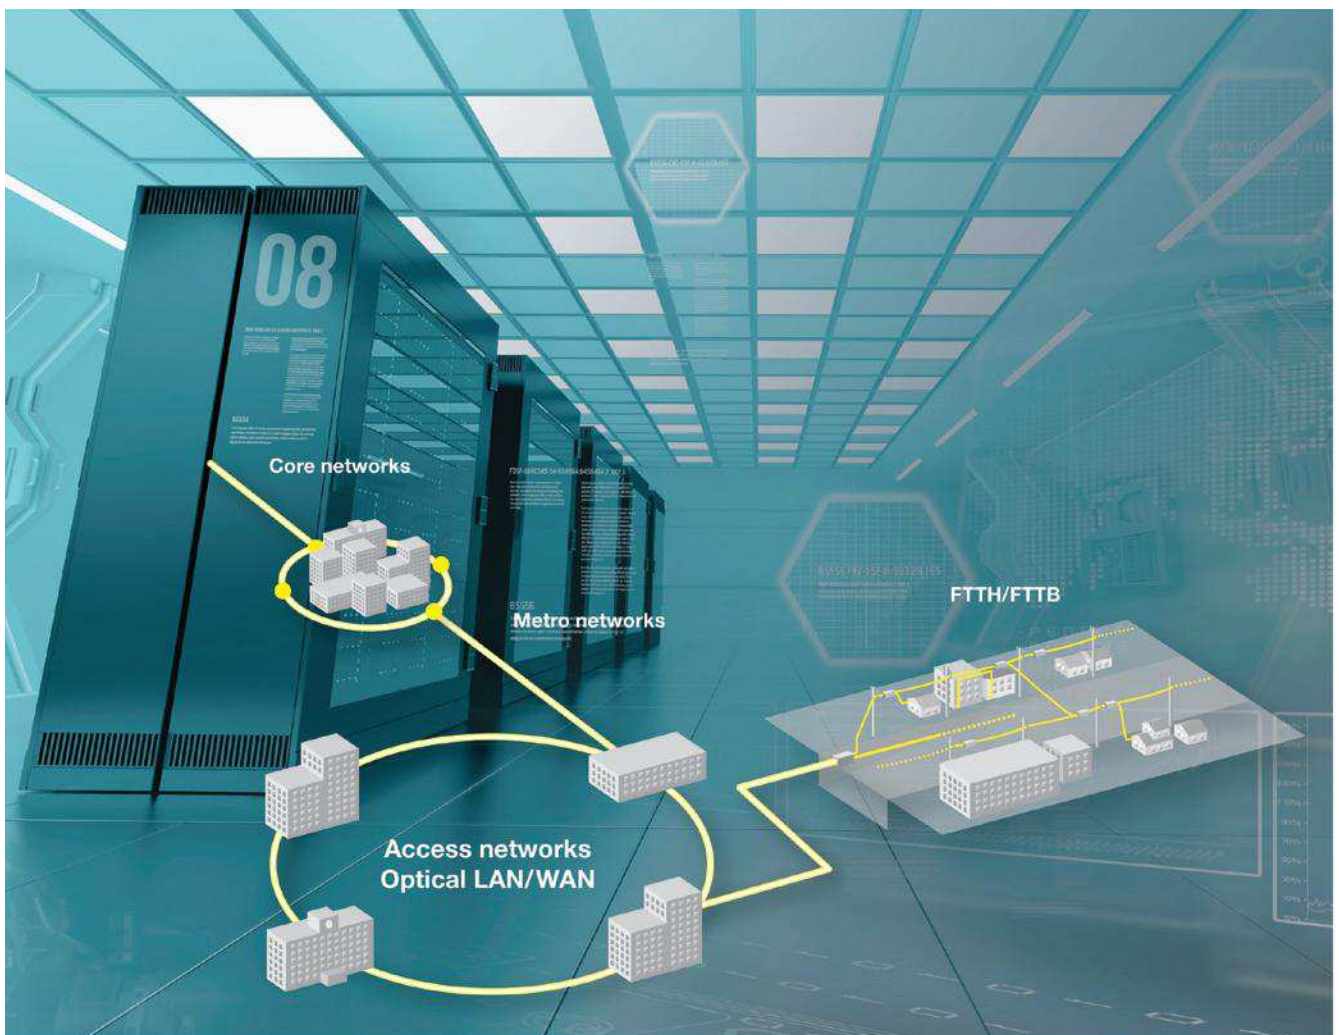



# Fast, Friendly Functionality... all at your Fingertips!

## Multi-tasking

### Enhancing productivity

Managed by a highly efficient operating system, multiple functions can work simultaneously.

Now, users can perform OTDR measurements on a particular fiber core while simultaneously checking the power level and connector surface quality on others.



## Dual-operation Mode

### Touch screen and hard-key buttons

Tap, swipe, pinch or press. Choose between the high resolution 8.4-inch multi-touch capacitive touchscreen or the robust hard-key buttons in any combination desired. OTDR operations have never been easier!



## Lightning Startup Time

### Under 10 seconds!

Thanks to the latest high speed hardware and a highly efficient operating system, the AQ7280 starts up from completely OFF to measurement ready in seconds. It's always ready when you are!



## Smart Mapper

### Single button measurement. Comprehensive network characterization. Easy to read report

Measurement acquisitions with multiple pulse widths and smart-algorithm enable users to detect and comprehensively characterize network events by pressing one single button.

Simple, icon-based map view for easy interpretation of network events. Immediate PASS/FAIL judgment based on user-defined thresholds.

Easily toggled trace view for manual supplementary analysis.

(Available when /SMP option is selected.)



## Multi-Fiber Measurement

### Database view. Organized. Quick preview of network characteristics

OTDR-based application in a database view.

Guiding users in tracking multi fibers measurements in sequence.


OTDR trace, power level and connector surface image of a particular fiber core are organized as one group. With PASS/FAIL judgment, fiber core performance is easily characterized.



## Wireless Connectivity

### Remote control. Remote data transfer

Control the OTDR remotely using Windows™ operating system devices via wireless router connection technology. Transfer measurements results from the OTDR to Windows™ operating system devices via FlashAir™ technology. Send the results/reports by email/file transfer software for immediate reporting. OTDR Data Transporter, a smartphone application for AQ7280, makes the file transfer easier.

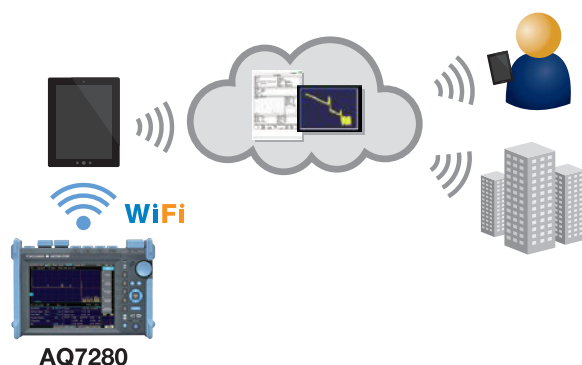


## Eagle Eye

### Hunt down your breakpoint precisely and promptly

Enabling highest possible sampling resolution in a long distance measurement range, distance offset error is reduced.

With a relatively small distance offset error, users are able to pinpoint the actual break location in high distance accuracy.

Faster location identification, faster repair time.



## 15 Hours Battery Operation

### Just keeps on going



Imagine working an entire work shift at your remote work site without worrying about running out of battery power. The AQ7280's powerful Li-Ion battery will last for an amazing 15 hours under the

Telcordia standard conditions and 10 hours even with the laser continuously turned on!

## Modularity

### Full range of selections

12 OTDR units ranging from single mode to multi mode, from low dynamic range to ultra-high dynamic range, and 2 wavelengths to 4 wavelengths.

Selection of power sensor, light source, visible light source and fiber inspection probe for instrument's customization based on users' needs.



## Connector Quality Assurance

### Zoomed in, checked out, all fixed up

Using high-performance Lightel™ fiber inspection probe, fiber connector surface is visualized for inspection of scratches and dirt. Reducing 90% of fiber cable problem.

Fiber Surface Test function\* automatically analyzes scratches and dirt and makes PASS/FAIL judgment based on IEC61300-3-35 compatible or arbitrary decision criteria.

\*Available when /FST option is selected.



Fiber Surface Test function


| Fiber Type  | Standard | Result |
|-------------|----------|--------|
| Single Mode | 7        | Pass   |
| Single Mode | 8        | Pass   |
| Single Mode | 9        | Pass   |
| Single Mode | 10       | Pass   |
| Single Mode | 11       | Pass   |
| Single Mode | 12       | Pass   |
| Single Mode | 13       | Pass   |
| Single Mode | 14       | Pass   |
| Single Mode | 15       | Pass   |
| Single Mode | 16       | Pass   |
| Single Mode | 17       | Pass   |
| Single Mode | 18       | Pass   |
| Single Mode | 19       | Pass   |
| Single Mode | 20       | Pass   |
| Single Mode | 21       | Pass   |
| Single Mode | 22       | Pass   |
| Single Mode | 23       | Pass   |
| Single Mode | 24       | Pass   |
| Single Mode | 25       | Pass   |
| Single Mode | 26       | Pass   |
| Single Mode | 27       | Pass   |
| Single Mode | 28       | Pass   |
| Single Mode | 29       | Pass   |
| Single Mode | 30       | Pass   |
| Single Mode | 31       | Pass   |
| Single Mode | 32       | Pass   |
| Single Mode | 33       | Pass   |
| Single Mode | 34       | Pass   |
| Single Mode | 35       | Pass   |
| Single Mode | 36       | Pass   |
| Single Mode | 37       | Pass   |
| Single Mode | 38       | Pass   |
| Single Mode | 39       | Pass   |
| Single Mode | 40       | Pass   |
| Single Mode | 41       | Pass   |
| Single Mode | 42       | Pass   |
| Single Mode | 43       | Pass   |
| Single Mode | 44       | Pass   |
| Single Mode | 45       | Pass   |
| Single Mode | 46       | Pass   |
| Single Mode | 47       | Pass   |
| Single Mode | 48       | Pass   |
| Single Mode | 49       | Pass   |
| Single Mode | 50       | Pass   |
| Single Mode | 51       | Pass   |
| Single Mode | 52       | Pass   |
| Single Mode | 53       | Pass   |
| Single Mode | 54       | Pass   |
| Single Mode | 55       | Pass   |
| Single Mode | 56       | Pass   |
| Single Mode | 57       | Pass   |
| Single Mode | 58       | Pass   |
| Single Mode | 59       | Pass   |
| Single Mode | 60       | Pass   |
| Single Mode | 61       | Pass   |
| Single Mode | 62       | Pass   |
| Single Mode | 63       | Pass   |
| Single Mode | 64       | Pass   |
| Single Mode | 65       | Pass   |
| Single Mode | 66       | Pass   |
| Single Mode | 67       | Pass   |
| Single Mode | 68       | Pass   |
| Single Mode | 69       | Pass   |
| Single Mode | 70       | Pass   |
| Single Mode | 71       | Pass   |
| Single Mode | 72       | Pass   |
| Single Mode | 73       | Pass   |
| Single Mode | 74       | Pass   |
| Single Mode | 75       | Pass   |
| Single Mode | 76       | Pass   |
| Single Mode | 77       | Pass   |
| Single Mode | 78       | Pass   |
| Single Mode | 79       | Pass   |
| Single Mode | 80       | Pass   |
| Single Mode | 81       | Pass   |
| Single Mode | 82       | Pass   |
| Single Mode | 83       | Pass   |
| Single Mode | 84       | Pass   |
| Single Mode | 85       | Pass   |
| Single Mode | 86       | Pass   |
| Single Mode | 87       | Pass   |
| Single Mode | 88       | Pass   |
| Single Mode | 89       | Pass   |
| Single Mode | 90       | Pass   |
| Single Mode | 91       | Pass   |
| Single Mode | 92       | Pass   |
| Single Mode | 93       | Pass   |
| Single Mode | 94       | Pass   |
| Single Mode | 95       | Pass   |
| Single Mode | 96       | Pass   |
| Single Mode | 97       | Pass   |
| Single Mode | 98       | Pass   |
| Single Mode | 99       | Pass   |
| Single Mode | 100      | Pass   |

Result screen of Fiber Surface Test

# Valuable functions for easily troubleshooting network issues

## PDF Reporting

Built-in post-processing software for generating OTDR reports in PDF format. Flexible configuration of report template to meet users' report requirements. Using AQ7280 Wireless Connectivity, the PDF reports can be transferred through internet for immediate reporting.

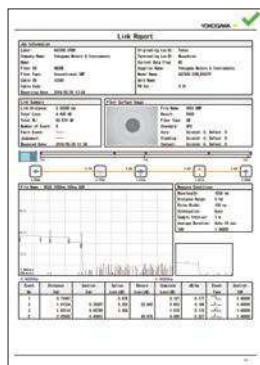

## Intermittent Connection Monitoring

Under cold weather conditions, fiber network connectivity can be interrupted intermittently due to bending/loose connections events.

Identifying such intermittent interruption requires periodic monitoring and advanced analysis algorithm.

The OTDR Schedule Measurement function is useful to monitor a particular fiber core based on user-defined measurement period and interval.

Measurement results are compared with a reference trace and analyzed for any discrepancies. Based on user-defined loss threshold, discrepancy at a particular distance is identified and the occurrence time is recorded. (Available when /MNT option is selected.)




## 7 PON Optimized

Excellent hardware performance and advanced analysis algorithm, enables the AQ7280\* to accurately characterize Passive Optical Network (PON) through high-port-count splitters (up to  $1 \times 128$ ).

PON mode assists beginner/expert users in simply configuring OTDR measurement settings based on PON topology information for optimal results. Short event dead zone and high sampling resolution enable users to detect near-end location of connectors that are as close as 0.5 meters (<20 inches).

With the built-in optical cut filter and dedicated measurement port, the AQ7283F module is capable to measure live PON for maintenance purpose.

\*Available in selected AQ7280 modules.

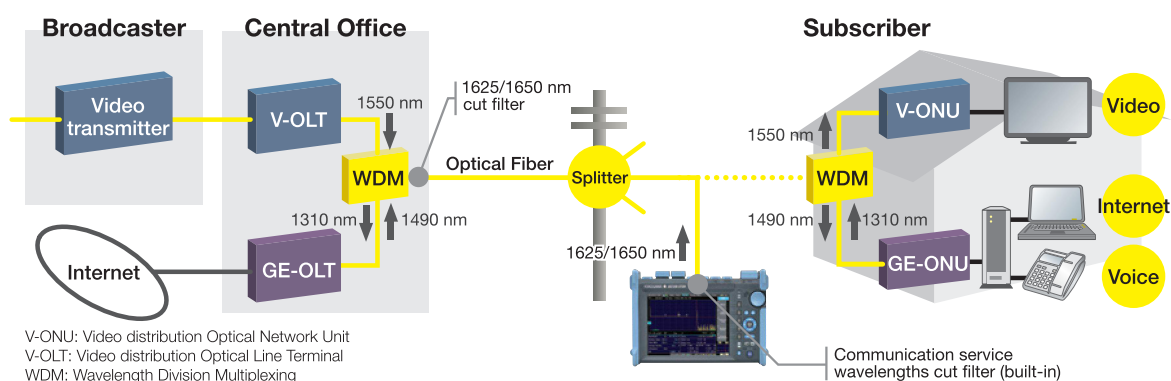

## Multi-language Support



Wide selection of display languages to assist users in operating the AQ7280 in their native language.

Available languages including but not limited to Chinese, Czech, Dutch, English, Finnish, French, German, Italian, Norwegian, Polish, Portuguese, Spanish, Swedish, and Turkish.



# Invaluable options supporting installation and maintenance works

## Optical Power Meter & Checker

8



Measures and displays optical power of a light source as an absolute/relative value for testing transmitter/network performance. Measurement results can be saved for reference purpose.

Invaluable test instrument during installation and maintenance.

Calibrated and selectable wavelength setting. Single-mode and Multi-mode measurement ready. Continuous wave and modulated wave detection capability.



Two selections of optical power sensor are available, which are optical power meter and optical power checker\*, different on the specs and functions.

\*Available in selected OTDR units as an option.

## Optical Light Source\*



Outputs a stable, continuous wave of light for measuring end-to-end attenuation accurately when paired with Optical Power Sensor. Modulated light function at 270 Hz/1 kHz/2 kHz is also available for fiber identification or continuity check purpose on a live fiber network.

\*Available in selected OTDR units as an option.


## Visible Light Source



Visible, continuous/modulated red light laser. Invaluable test instrument for checking continuity of patchcords, launch fibers, or short fiber trunks. Breaks and bendings in fiber can be identified visually as the visible light exits the fiber on such fault events.

## AQ7932 Emulation Software



Powerful post-processing software. Analyzing/editing trace data on a PC. The Report Creation Wizard function provides a step-by-step guidance for users in generating comprehensive reports in a printable format and Excel format.

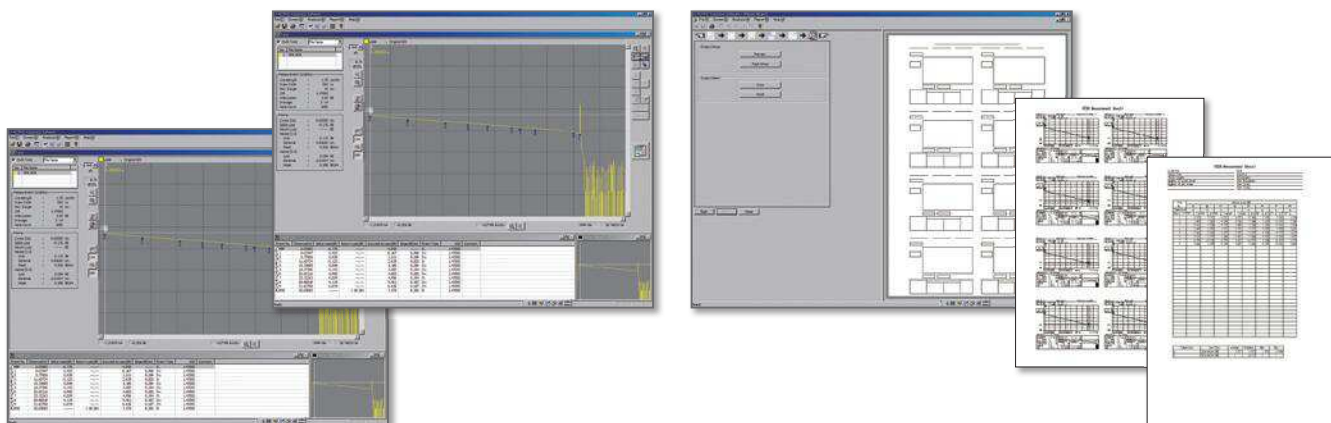



# Design and Selection Guide

9

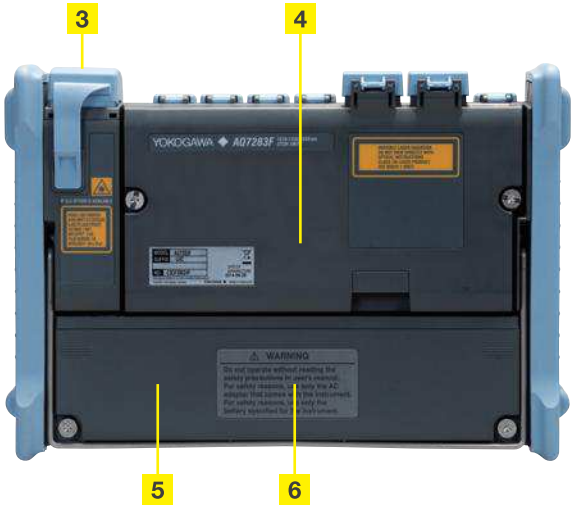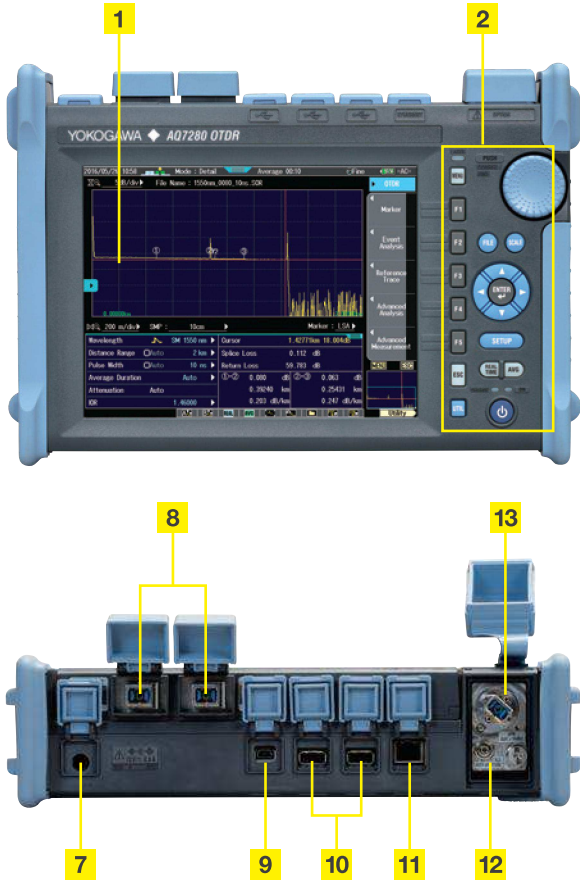

- 1

Multi-touch touchscreen
- 2

Hard-key buttons
- 3

OPM, VLS module
- 4

OTDR unit
- 5

Battery (inside)
- 6

SD card slot (inside)
- 7

DC power input

8

OTDR, OLS port

9

USB 2.0 mini port

10

USB 2.0 port

11

Ethernet port

12

VLS port

13

OPM port

NOTE: Certain functions and ports may be optional. Please refer to the specifications section for details.

| OTDR unit | Number of wavelength | Dynamic range (dB) |              |              |              |                 |                 |             |              | Test application |             |                | Fiber network |       |        |     |          |
|-----------|----------------------|--------------------|--------------|--------------|--------------|-----------------|-----------------|-------------|--------------|------------------|-------------|----------------|---------------|-------|--------|-----|----------|
|           |                      | SM 1310 (nm)       | SM 1383 (nm) | SM 1490 (nm) | SM 1550 (nm) | SM 1625 (nm)    | SM 1650 (nm)    | MM 850 (nm) | MM 1300 (nm) | Installation     | Maintenance |                | Core          | Metro | Access | PON | MM fiber |
| AQ7282A   | 2                    | 38                 |              |              | 36           |                 |                 |             |              | ●                | ●           |                |               |       | ●      | ●   |          |
| AQ7283A   | 2                    | 42                 |              |              | 40           |                 |                 |             |              | ●                | ●           |                |               | ●     | ●      | ●   |          |
| AQ7284A   | 2                    | 46                 |              |              | 45           |                 |                 |             |              | ●                | ●           |                | ●             | ●     | ●      |     |          |
| AQ7285A   | 2                    | 50                 |              |              | 50           |                 |                 |             |              | ●                | ●           |                | ●             | ●     | ●      |     |          |
| AQ7283E   | 3                    | 42                 |              |              | 40           | 40 <sup>1</sup> |                 |             |              | ●                | ●           | ●              |               | ●     | ●      | ●   |          |
| AQ7283F   | 3                    | 42                 |              |              | 40           |                 | 40 <sup>1</sup> |             |              | ●                | ●           | ●              |               | ●     | ●      | ●   |          |
| AQ7283H   | 3                    | 42                 |              |              | 40           | 39              |                 |             |              | ●                | ●           | ○ <sup>2</sup> |               | ●     | ●      | ●   |          |
| AQ7284H   | 3                    | 46                 |              |              | 45           | 44              |                 |             |              | ●                | ●           | ○ <sup>2</sup> | ●             | ●     | ●      |     |          |
| AQ7282G   | 3                    | 38                 |              | 36           | 36           |                 |                 |             |              | ●                | ●           |                |               |       | ●      | ●   |          |
| AQ7283K   | 4                    | 42                 |              | 38           | 40           | 40              |                 |             |              | ●                | ●           | ○ <sup>2</sup> |               | ●     | ●      | ●   |          |
| AQ7283J   | 4                    | 42                 | 39           |              | 40           | 40              |                 |             |              | ●                | ●           | ○ <sup>2</sup> |               | ●     | ●      | ●   |          |
| AQ7282M   | 2                    |                    |              |              |              |                 |                 | 25          | 27           | ●                | ●           |                |               |       |        |     | ●        |

\*1 Port2, Built-in filter  
\*2 Using an external filter

# Specifications

AQ7280

## AQ7280 OTDR Mainframe

| Items                 |                            | Specifications                                                                                                                                                       |
|-----------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Display <sup>*1</sup> |                            | 8.4-inch color TFT LCD (Resolution: 800 × 600, Multi-touch capacitive touchscreen)                                                                                   |
| Electrical interface  |                            | Unit interface × 1, Module interface × 1, USB 2.0 × 3 (TYPE A × 2, TYPE B (mini) × 1) <sup>*2</sup> , Ethernet (10/100BASE-T, Option) × 1, SD card slot × 1          |
| Remote control        |                            | USB TYPE B (mini), Ethernet (TCP/IP)                                                                                                                                 |
| Data storage          | Storage                    | Internal storage: ≥1000 waveforms, External storage: USB memory, SD card                                                                                             |
|                       | File format                | Write: SOR, CSV, SET, BMP, JPG, CFG, PDF, Read: SOR, SET                                                                                                             |
| Dimensions            |                            | Approx. 287 mm (W) × 210 mm (H) × 80 mm (D) (excluding projections)                                                                                                  |
| Weight                |                            | Approx. 2.2 kg (including internal battery and protectors, excluding OTDR unit and options)                                                                          |
| OTDR functions        | Minimum readout resolution | Horizontal axis: 1 cm, Vertical axis: 0.001 dB                                                                                                                       |
|                       | Group refractive index     | 1.30000 to 1.79999 (in 0.00001 steps)                                                                                                                                |
|                       | Distance unit              | km, mile, kf                                                                                                                                                         |
|                       | Measurement                | Distance, Loss, Return loss, and Return loss between two arbitrary points                                                                                            |
|                       | Analysis                   | Multi Trace Analysis, Two-Way Trace Analysis, Difference Trace Analysis, Section Analysis, Macro Bending Analysis                                                    |
|                       | Other functions            | Multi Fiber Project, Fault Locator, Work Completion Notice, File report, Auto event search, Pass/Fail judgment, Schedule Measurement (Option), Smart Mapper (Option) |

<sup>\*1</sup> The LCD may contain some pixels that are always ON or OFF (0.002% or fewer of all displayed pixels including RGB), but this is not indicative of a general malfunction.

<sup>\*2</sup> USB TYPE A is for external memory, external printer, and fiber inspection probe. USB TYPE B (mini) is for remote control and internal storage access with a PC.

10

## OTDR units

| Items                                  | Specifications                                                        |         |                                                   |         |                                    |                                                             |
|----------------------------------------|-----------------------------------------------------------------------|---------|---------------------------------------------------|---------|------------------------------------|-------------------------------------------------------------|
| Model                                  | AQ7282A                                                               | AQ7283A | AQ7284A                                           | AQ7285A | AQ7283E                            | AQ7283F                                                     |
| Wavelength (nm)                        | 1310 ±25/1550 ±25                                                     |         |                                                   |         | 1310 ±25/1550 ±25,<br>1625 ±10     | 1310 ±25/1550 ±25,<br>1650 ±5 <sup>⑥</sup> ±10 <sup>⑦</sup> |
| Number of optical port                 | 1                                                                     |         |                                                   |         | 2<br>(Port 2: 1625 nm with filter) | 2<br>(Port 2: 1650 nm with filter)                          |
| Applicable fiber                       | SM (ITU-T G.652)                                                      |         |                                                   |         |                                    |                                                             |
| Distance range (km)                    | 0.2, 0.5, 1, 2, 5, 10, 20, 30, 50, 100, 200, 300, 400, 512            |         |                                                   |         |                                    |                                                             |
| Pulse width (ns)                       | 3, 10, 20, 30, 50, 100, 200, 300, 500, 1000, 2000, 5000, 10000, 20000 |         |                                                   |         |                                    |                                                             |
| Event dead zone <sup>③</sup> (m)       | 0.6                                                                   |         |                                                   | 0.5     | 0.6                                |                                                             |
| Attenuation dead zone <sup>④</sup> (m) | 3.5/4                                                                 |         |                                                   |         | 3.5/4, 4                           |                                                             |
| Dynamic range <sup>⑤</sup> (dB)        | 38/36                                                                 | 42/40   | 46/45                                             | 50/50   | 42/40, 40                          |                                                             |
| Optical connector                      | Universal Adapter SC, FC, LC, and SC Angled-PC                        |         |                                                   |         |                                    |                                                             |
| Laser class                            | Class 1M or Class 1                                                   |         | Class 1M or Class 1 (1550 nm), Class 3R (1310 nm) |         | Class 1M or Class 1                |                                                             |
| Maximum optical pulse output power     | —                                                                     |         |                                                   |         |                                    | ≤+15 dBm (1650 nm)                                          |

| Items                                   | Specifications                                                        |                                                        |                            |                                                             |                                                             |                                                                                      |
|-----------------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------|----------------------------|-------------------------------------------------------------|-------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Model                                   | AQ7283H                                                               | AQ7284H                                                | AQ7282G                    | AQ7283K                                                     | AQ7283J                                                     | AQ7282M                                                                              |
| Wavelength (nm)                         | 1310 ±25/1550 ±25/1625 ±25                                            |                                                        | 1310 ±25/1490 ±15/1550 ±25 | 1310 ±25/1490 ±25/1550 ±25/1625 ±25                         | 1310 ±25/1383 ±2/1550 ±25/1625 ±25                          | 850 ±30/1300 ±30                                                                     |
| Number of optical port                  | 1                                                                     |                                                        |                            |                                                             |                                                             |                                                                                      |
| Applicable fiber                        | SM (ITU-T G.652)                                                      |                                                        |                            |                                                             |                                                             | GI50, GI62.5                                                                         |
| Distance range (km)                     | 0.2, 0.5, 1, 2, 5, 10, 20, 30, 50, 100, 200, 300, 400, 512            |                                                        |                            |                                                             |                                                             | 0.2, 0.5, 1, 2, 5, 10, 20, 30, 50, 100                                               |
| Pulse width (ns)                        | 3, 10, 20, 30, 50, 100, 200, 300, 500, 1000, 2000, 5000, 10000, 20000 |                                                        |                            |                                                             |                                                             | 3, 10, 20, 30, 50, 100, 200, 300, 500, 1000, 2000 <sup>*9</sup> , 5000 <sup>*9</sup> |
| Event dead zone <sup>*3</sup> (m)       | 0.6                                                                   |                                                        |                            |                                                             |                                                             | 0.6 <sup>*10</sup>                                                                   |
| Attenuation dead zone <sup>*4</sup> (m) | 3.5/4/4                                                               |                                                        | 3.5/4/4                    | 3.5/4/4/4                                                   |                                                             |                                                                                      |
| Dynamic range <sup>*5</sup> (dB)        | 42/40/39                                                              | 46/45/44                                               | 38/36/36                   | 42/38/40/40                                                 | 42/39/40/40                                                 | 25/27 <sup>*11</sup>                                                                 |
| Optical connector                       | Universal Adapter SC, FC, LC, and SC Angled-PC                        |                                                        |                            |                                                             |                                                             | Universal Adapter SC, FC, LC                                                         |
| Laser class                             | Class 1M or Class 1                                                   | Class 1M or Class 1 (1550/1625 nm), Class 3R (1310 nm) | Class 1M or Class 1        | Class 1M or Class 1 (1490/1550/1625 nm), Class 3R (1310 nm) | Class 1M or Class 1 (1383/1550/1625 nm), Class 3R (1310 nm) | Class 1M or Class 1 (1300 nm), Class 3R (850 nm)                                     |
| Maximum optical pulse output power      | —                                                                     |                                                        |                            |                                                             |                                                             |                                                                                      |

## For all OTDR units

| Items                                   | Specifications                                                                |
|-----------------------------------------|-------------------------------------------------------------------------------|
| Sampling resolution                     | Min. 2 cm                                                                     |
| Number of sampling points               | Max. 256000                                                                   |
| Distance measurement accuracy           | ±(0.75 m + Measurement distance × 2 × 10 <sup>-5</sup> + Sampling resolution) |
| Loss measurement accuracy <sup>*8</sup> | ±0.03 dB/dB                                                                   |
| Return loss measurement accuracy        | ±2 dB                                                                         |
| Dimensions                              | Approx. 211 mm (W) × 110 mm (H) × 32 mm (D) (excluding projections)           |
| Weight                                  | Approx. 420 g                                                                 |

<sup>\*3</sup> Pulse width: 3 ns, Return loss: ≥55 dB, Group refractive index: 1.5, at 1.5 dB below the unsaturated peak level, Typical

<sup>\*4</sup> Pulse width: 10 ns, Return loss: ≥55 dB, Group refractive index: 1.5, at a point where the backscatter level is within ±0.5 dB of the normal level, Typical

<sup>\*5</sup> Pulse width: 20000 ns, Measurement time: 3 minutes, SNR=1, Typical, Decrease by 0.5 dB with an angled-PC connector, Decrease by 0.5 dB with /SLS option for AQ7284A, AQ7285A and AQ7284H.

<sup>\*6</sup> At 20 dB below the spectral peak of pulsed optical output, at 23°C, after warm-up of 30 minutes

<sup>\*7</sup> At 60 dB below the spectral peak of pulsed optical output, at 23°C, after warm-up of 30 minutes

<sup>\*8</sup> For a loss 1 dB or less, the accuracy is ±0.05 dB.

<sup>\*9</sup> 1300 nm only

<sup>\*10</sup> Return loss condition changes to ≥40 dB.

<sup>\*11</sup> Pulse width: 500 ns (850 nm)/1000 ns (1300 nm), Measurement time: 3 minutes, SNR=1, GI50, Typical



## Optional functions for OTDR units

| Items                                |                                            | Specifications              |         |         |         |                                |         |                                |
|--------------------------------------|--------------------------------------------|-----------------------------|---------|---------|---------|--------------------------------|---------|--------------------------------|
| Model                                |                                            | AQ7282A                     | AQ7283A | AQ7284A | AQ7285A | AQ7283E                        | AQ7283F | AQ7283H                        |
| Power Checker<br>(/PC)               | Wavelength setting                         | 1310/1490/1550/1625/1650 nm |         |         |         |                                |         |                                |
|                                      | Power range <sup>*12</sup>                 | -50 to -5 dBm               |         |         |         |                                |         |                                |
|                                      | Measurement accuracy <sup>*13</sup>        | ±0.5 dB                     |         |         |         |                                |         |                                |
|                                      | Optical input port                         | OTDR port                   |         |         |         |                                |         |                                |
| Stabilized Light<br>Source<br>(/SLS) | Wavelength (nm)                            | 1310 ±25/1550 ±25           |         |         |         | 1310 ±25/1550 ±25,<br>1625 ±10 |         | 1310 ±25/1550 ±25/<br>1625 ±25 |
|                                      | Optical output power                       | -3 dBm ±1 dB                |         |         |         |                                |         |                                |
|                                      | Output power stability <sup>*14</sup> (dB) | ±0.05                       |         |         |         | ±0.05/±0.05, ±0.15             |         | ±0.05/±0.05/±0.15              |
|                                      | Modulation mode                            | CW, 270 Hz, 1 kHz, 2 kHz    |         |         |         |                                |         |                                |
|                                      | Optical output port                        | OTDR port                   |         |         |         |                                |         |                                |
|                                      | Laser class                                | Class 1M or Class 1         |         |         |         |                                |         |                                |

| Items                                |                                            | Specifications                 |  |                                |  |                                         |  |                                  |                                 |
|--------------------------------------|--------------------------------------------|--------------------------------|--|--------------------------------|--|-----------------------------------------|--|----------------------------------|---------------------------------|
| Model                                |                                            | AQ7284H                        |  | AQ7282G                        |  | AQ7283K                                 |  | AQ7283J                          | AQ7282M                         |
| Power Checker<br>(/PC)               | Wavelength setting                         | 1310/1490/1550/1625/1650 nm    |  |                                |  |                                         |  |                                  | —                               |
|                                      | Power range <sup>*12</sup>                 | -50 to -5 dBm                  |  |                                |  |                                         |  |                                  | —                               |
|                                      | Measurement accuracy <sup>*13</sup>        | ±0.5 dB                        |  |                                |  |                                         |  |                                  | —                               |
|                                      | Optical input port                         | OTDR port                      |  |                                |  |                                         |  |                                  | —                               |
| Stabilized Light<br>Source<br>(/SLS) | Wavelength (nm)                            | 1310 ±25/1550 ±25/<br>1625 ±25 |  | 1310 ±25/1490 ±15/<br>1550 ±25 |  | 1310 ±25/1490 ±25/<br>1550 ±25/1625 ±25 |  | 1310 ±25/-/<br>1550 ±25/1625 ±25 | 850 ±30/1300 ±30                |
|                                      | Optical output power                       | -3 dBm ±1 dB                   |  |                                |  |                                         |  |                                  | ≥-20 dBm                        |
|                                      | Output power stability <sup>*14</sup> (dB) | ±0.05/±0.05/±0.15              |  | ±0.05/±0.15/±0.05              |  | ±0.05/±0.15/±0.05/±0.15                 |  | ±0.05/-/±0.05/±0.15              | ±0.15/±0.15                     |
|                                      | Modulation mode                            | CW, 270 Hz, 1 kHz, 2 kHz       |  |                                |  |                                         |  |                                  | CW, 270 Hz                      |
|                                      | Optical output port                        | OTDR port                      |  |                                |  |                                         |  |                                  | —                               |
|                                      | Laser class                                | Class 1M or Class 1            |  |                                |  |                                         |  |                                  | Class 3R/Class 1M or<br>Class 1 |

Power Checker (PC) is not available for AQ7282M, and Stabilized Light Source (SLS) is not available for the wavelength 1383 nm of AQ7283J.

\*12 CW, Safe maximum input power: 0 dBm (1 mW)

\*13 CW, 1310 nm, -10 dBm, SM (ITU-T G.652)

\*14 Constant temperature, 5 minutes after warm-up of 5 minutes

\*15 Not applicable to Port2

\*16 At 20 dB below the spectral peak of pulsed optical output, at 23°C, after warm-up of 30 minutes

\*17 At 60 dB below the spectral peak of pulsed optical output, at 23°C, after warm-up of 30 minutes

## OPM/VLS modules

| Items                      |                            | Specifications                                                                                                                        |                       |                               |                              |                               |
|----------------------------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|------------------------------|-------------------------------|
| Model                      |                            | AQ2780 OPM                                                                                                                            | AQ2781 High Power OPM | AQ2780V OPM & VLS             | AQ2781V High Power OPM & VLS | AQ4780 VLS                    |
| Optical Power Meter (OPM)  | Wavelength setting         | Simple mode: 850/1300/1310/1490/1550/1625/1650 nm, Detail mode: 800 to 1700 nm (1 nm steps), CWDM mode: 1270 to 1610 nm (20 nm steps) |                       |                               |                              | —                             |
|                            | Power range                | CW                                                                                                                                    | +10 to -70 dBm        | +27 to -50 dBm <sup>*18</sup> | +10 to -70 dBm               | +27 to -50 dBm <sup>*18</sup> |
|                            |                            |                                                                                                                                       | +7 to -70 dBm         | +24 to -50 dBm <sup>*18</sup> | +7 to -70 dBm                | +24 to -50 dBm <sup>*18</sup> |
|                            | Noise level <sup>*19</sup> | CHOP                                                                                                                                  | 0.5 nW (-63 dBm)      | 50 nW (-43 dBm)               | 0.5 nW (-63 dBm)             | 50 nW (-43 dBm)               |
|                            |                            |                                                                                                                                       | 0.5 nW (-63 dBm)      | 50 nW (-43 dBm)               | 0.5 nW (-63 dBm)             | 50 nW (-43 dBm)               |
|                            | Applicable fiber           | SM (ITU-T G.652), GI (50/125 μm)                                                                                                      |                       |                               |                              | —                             |
|                            | Uncertainty <sup>*20</sup> | ±5%                                                                                                                                   |                       |                               |                              | —                             |
|                            | Readout resolution         | 0.01 dB                                                                                                                               |                       |                               |                              | —                             |
|                            | Level unit                 | Absolute: dBm, mW, μW, nW, Relative: dB                                                                                               |                       |                               |                              | —                             |
|                            | Modulation mode            | CW, 270 Hz, 1 kHz, 2 kHz                                                                                                              |                       |                               |                              | —                             |
|                            | Averaging                  | 1, 10, 50, 100 times                                                                                                                  |                       |                               |                              | —                             |
| Visible Light Source (VLS) | Data save                  | 100 data per file (up to 1000 files)                                                                                                  |                       |                               |                              | —                             |
|                            | Data logging               | Logging intervals: 0.5, 1, 2, 5, 10 sec., Number of data: 10 to 1000 data                                                             |                       |                               |                              | —                             |
|                            | Optical connector          | Universal Adapter: SC, FC, Ferrule Adapter: φ1.25                                                                                     |                       |                               |                              | —                             |
|                            | Wavelength                 | —                                                                                                                                     |                       |                               |                              | 650 ±20 nm                    |
|                            | Optical output power       | —                                                                                                                                     |                       |                               |                              | ≥ -3 dBm (Peak)               |
|                            | Modulation mode            | —                                                                                                                                     |                       |                               |                              | CW, CHOP (Approx. 2 Hz)       |
|                            | Optical connector          | —                                                                                                                                     |                       |                               |                              | 2.5 mm ferrule type           |
| Laser class                |                            | —                                                                                                                                     |                       |                               |                              | Class 3R                      |
| Dimensions                 |                            | Approx. 47 mm (W) × 87 mm (H) × 29 mm (D) (excluding projections)                                                                     |                       |                               |                              |                               |
| Weight                     |                            | Approx. 140 g                                                                                                                         |                       |                               |                              |                               |

\*18 1300 to 1600 nm

\*19 1310 nm

\*20 Input power: 100 μW (-10 dBm), CW, 1310 ±20 nm, Spectral width: ≤10 nm, SM (ITU-T G.652), FC/PC, Wavelength setting: Measured wavelength ±0.5 nm, excluding a secular change of equipment

(add 1% one year after calibration)

## General specifications

| Items                                            |                               | Specifications                                                                                                                                                                                                  |  |
|--------------------------------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Environmental conditions                         | Operating temperature         | -10 to 50°C (0 to 40°C when AC adapter is being used. 0 to 35°C when the battery is be charged)                                                                                                                 |  |
|                                                  | Storage temperature           | -20 to 60°C                                                                                                                                                                                                     |  |
|                                                  | Humidity                      | 0 to 90% RH (20 to 90% with 739871 AC adapter, non-condensing)                                                                                                                                                  |  |
|                                                  | Altitude                      | 4000 m                                                                                                                                                                                                          |  |
| Power requirements                               |                               | 100 to 240VAC, 50/60Hz (AC adapter)                                                                                                                                                                             |  |
| Battery                                          | Type                          | Lithium-ion                                                                                                                                                                                                     |  |
|                                                  | Operating time <sup>*21</sup> | 15 hours (Telcordia GR-196-CORE Issue2 2010), 10 hours <sup>*22</sup> (Continuous measurement)                                                                                                                  |  |
|                                                  | Recharge time <sup>*21</sup>  | 6 hours                                                                                                                                                                                                         |  |
| EMC <sup>*23</sup>                               | Emission                      | EN 61326-1 Class A, EN 55011 Class A Group1                                                                                                                                                                     |  |
|                                                  | Immunity                      | EN 61326-1 Table2                                                                                                                                                                                               |  |
| Safety <sup>*23</sup>                            |                               | EN 61010-1                                                                                                                                                                                                      |  |
|                                                  | Laser                         | EN60825-1: 2014 Class 1 <sup>*25</sup> , IEC60825-1: 2007, GB7247.1-2012 Class 1M <sup>*26</sup> /EN60825-1: 2014, IEC60825-1: 2007, GB7247.1-2012 Class 3R <sup>*24,27</sup> , FDA 21CFR1040.10 <sup>*28</sup> |  |
| Environmental regulation standard <sup>*23</sup> |                               | EN50581                                                                                                                                                                                                         |  |

\*21 Typical

\*22 Power save mode, without an option module

\*25 CLASS 1

\*23 AQ7280 OTDR mainframe together with an OTDR unit and an OPM&VLS module.

\*24 1310 nm of AQ7284A, AQ7285A, AQ7284H and AQ7283K OTDR units, 850 nm of AQ7282M OTDR unit, and the visible light sources

\*26 CLASS 1M

\*27 CLASS 3R

\*28 21CFR1040.10



Note. All specifications are valid at 23°C±2°C, unless otherwise specified.

## Models and suffix codes

### OTDR Mainframe

| Models   | Suffix codes | Descriptions                |
|----------|--------------|-----------------------------|
| AQ7280   |              | AQ7280 OTDR Mainframe       |
| Language | -HJ          | Japanese/English            |
|          | -HE          | English (Multi language)    |
|          | -HM          | Chinese                     |
|          | -HC          | Chinese/English             |
|          | -HK          | Korean/English              |
|          | -HR          | Russian/English             |
| Options  | /FST         | Fiber Surface Test function |
|          | /MNT         | Monitoring function         |
|          | /SMP         | Smart Mapper function       |
|          | /LAN         | Ethernet                    |
|          | /SB          | Shoulder Belt               |

Standard accessories; Battery pack, hand belt, user's manual (CD-ROM), operation guide

### AC adapter (Not included in AQ7280. Please order separately.)

| Models     | Suffix codes | Descriptions                   |
|------------|--------------|--------------------------------|
| 739874     |              | AC Adapter <sup>1</sup>        |
| Power cord | -D           | UL/CSA standard, 125 V         |
|            | -F           | VDE standard, 250 V            |
|            | -H           | Chinese standard, 250 V        |
|            | -N           | Brazilian standard, 250 V      |
|            | -P           | Korean standard, 250 V         |
|            | -Q           | BS/Singaporean standard, 250 V |
|            | -R           | Australian standard, 250 V     |
|            | -T           | Taiwanese standard, 125 V      |
|            | -A           | Argentine standard, 250 V      |
|            |              |                                |

\*1 For outside the countries that require CE marking.

### OTDR units

| Models  | Suffix codes | Descriptions                                    |
|---------|--------------|-------------------------------------------------|
| AQ7282A |              | 2WL 1310/1550 nm 38/36 dB                       |
| AQ7283A |              | 2WL 1310/1550 nm 42/40 dB                       |
| AQ7284A |              | 2WL 1310/1550 nm 46/45 dB                       |
| AQ7285A |              | 2WL 1310/1550 nm 50/50 dB                       |
| AQ7283E |              | 3WL 1310/1550,1625 nm 42/40, 40 dB <sup>4</sup> |
| AQ7283F |              | 3WL 1310/1550,1650 nm 42/40, 40 dB <sup>4</sup> |
| AQ7283H |              | 3WL 1310/1550/1625 nm 42/40/39 dB               |
| AQ7284H |              | 3WL 1310/1550/1625 nm 46/45/44 dB               |
| AQ7282G |              | 3WL 1310/1490/1550 nm 38/36/36 dB               |
| AQ7283K |              | 4WL 1310/1490/1550/1625 nm 42/38/40/40 dB       |
| AQ7283J |              | 4WL 1310/1383/1550/1625 nm 42/39/40/40 dB       |
| AQ7282M |              | 2WL 850/1300 nm (MM) 25/27 dB                   |
|         | -USC         | Universal Adapter (SC)                          |
|         | -UFC         | Universal Adapter (FC)                          |
|         | -ULC         | Universal Adapter (LC)                          |
|         | -ASC         | Universal Adapter (SC Angled-PC) <sup>1</sup>   |
| Options | -NUA         | No universal adapter                            |
|         | /PC          | Power Checker <sup>1,2</sup>                    |
|         | /SLS         | Stabilized Light Source <sup>3</sup>            |

\*1 Not applicable to AQ7282M

\*2 Not applicable to the Port2 of AQ7283E and AQ7283F

\*3 Not applicable to the wavelength 1383 nm of AQ7283J.

\*4 The port for 1650 nm or 1625 nm is equipped with a built-in filter.

### OPM/VLS modules

| Models            | Suffix codes | Descriptions                |
|-------------------|--------------|-----------------------------|
| AQ2780            |              | OPM Module                  |
| AQ2781            |              | High Power OPM Module       |
| AQ2780V           |              | OPM & VLS Module            |
| AQ2781V           |              | High Power OPM & VLS Module |
| Optical connector | -SCC         | Universal Adapter (SC)      |
|                   | -FCC         | Universal Adapter (FC)      |
|                   | -LMC         | Ferrule Adapter (ø1.25)     |

| Models | Suffix codes | Descriptions |
|--------|--------------|--------------|
| AQ4780 |              | VLS Module   |

### Accessories (Sold separately)

| Names                   | Models      | Descriptions   |
|-------------------------|-------------|----------------|
| Soft Carrying Case      | 739860      |                |
| Battery Pack            | 739883      |                |
| Universal Adapter (SC)  | SU2005A-SCC | for OTDR unit  |
| Universal Adapter (FC)  | SU2005A-FCC | for OTDR unit  |
| Universal Adapter (LC)  | SU2005A-LCC | for OTDR unit  |
| Universal Adapter (SC)  | 735480-SCC  | for OPM module |
| Universal Adapter (FC)  | 735480-FCC  | for OPM module |
| Ferrule Adapter (ø1.25) | 735481-LMC  | for OPM module |
| Ferrule Adapter (ø2.5)  | 735481-SFC  | for OPM module |
| Shoulder Belt           | B8070CY     |                |



SU2005A-FCC, SU2005A-SCC, SU2005A-LCC



735480-FCC, 735480-SCC, 735481-LMC

### Application software

| Models | Suffix codes | Descriptions                                                  |
|--------|--------------|---------------------------------------------------------------|
| 735070 |              | AQ7932 Emulation Software (Ver. 5.01 or later)                |
|        | -EN          | English                                                       |
|        | -JA          | Japanese                                                      |
|        | -CH          | Chinese                                                       |
|        | -KO          | Korean                                                        |
| 735071 |              | AQ7940 Optical Fiber Monitoring Software (Ver. 5.01 or later) |
| 735050 | -HE          | English/Japanese                                              |
|        |              | Additional option license for AQ7280                          |
|        | -FST         | Fiber Surface Test function                                   |
|        | -MNT         | Monitoring function                                           |
|        | -SMP         | Smart Mapper function                                         |

#### Notice

- Before operating the product, read the user's manual thoroughly for proper and safe operation.
- Any company names and product names mentioned in this document are trade names, trademarks or registered trademarks of their respective companies.
- "Typical" or "Typ." in this document means "Typical value", which is for reference, not guaranteed specification.
- Three-year warranty is for the OTDR mainframe, OTDR units, and OPM/VLS modules.

Microsoft, MS, and Windows are registered trademarks or trademarks of Microsoft Corporation in the US and other countries. Other company names and product names appearing in this document are the registered trademarks of their respective companies.

### Yokogawa's Approach to Preserving the Global Environment

- Yokogawa's electrical products are developed and produced in facilities that have received ISO14001 approval.
- In order to protect the global environment, Yokogawa's electrical products are designed in accordance with Yokogawa's Environmentally Friendly Product Design Guidelines and Product Design Assessment Criteria.



#### NOTICE

- Before operating the product, read the user's manual thoroughly for proper and safe operation.

# YOKOGAWA

## YOKOGAWA TEST & MEASUREMENT CORPORATION

Global Sales Dept. /Phone: +81-422-52-6237 E-mail: tm@cs.jp.yokogawa.com  
Facsimile: +81-422-52-6462

## YOKOGAWA CORPORATION OF AMERICA

## YOKOGAWA EUROPE B.V.

## YOKOGAWA TEST & MEASUREMENT (SHANGHAI) CO., LTD.

## YOKOGAWA ELECTRIC KOREA CO., LTD.

## YOKOGAWA ENGINEERING ASIA PTE. LTD.

## YOKOGAWA INDIA LTD.

## YOKOGAWA ELECTRIC CIS LTD.

## YOKOGAWA AMERICA DO SUL LTDA.

## YOKOGAWA MIDDLE EAST & AFRICA B.S.C(c)

Phone: +1-800-888-6400  
Phone: +31-88-4641429  
Phone: +86-21-6239-6363  
Phone: +82-2-2628-3810  
Phone: +65-6241-9933  
Phone: +91-80-4158-6396  
Phone: +7-495-737-78-68  
Phone: +55-11-3513-1300  
Phone: +973-17-358100

E-mail: tmi@us.yokogawa.com  
E-mail: tmi@nl.yokogawa.com  
E-mail: tmi@cs.cn.yokogawa.com  
E-mail: TMI@kr.yokogawa.com  
E-mail: TMI@sg.yokogawa.com  
E-mail: tmi@in.yokogawa.com  
E-mail: info@ru.yokogawa.com  
E-mail: tm@br.yokogawa.com  
E-mail: help.ymatmi@bh.yokogawa.com

Facsimile: +86-21-6880-4987  
Facsimile: +82-2-2628-3899  
Facsimile: +65-6241-9919  
Facsimile: +91-80-2852-1442  
Facsimile: +7-495-737-78-69  
Facsimile: +973-17-336100

<https://tmi.yokogawa.com/>

YMI-KS-MI-SE07

The contents in this catalog is as of June 2019. Subject to change without notice.

Copyright © 2014, Yokogawa Test & Measurement Corporation

[Ed: 07/b]

Printed in Japan, 906(KP)



---

## Revisions

---

Bulletin AQ7280-01EN 7th Edition

There are some revisions in this brochure. Please be aware of the changes below.

1. Specifications of Humidity (page 11)
  - General specifications

On the brochure:

| Items                    |          | Descriptions                                                   |
|--------------------------|----------|----------------------------------------------------------------|
| Environmental conditions | Humidity | 0 to 90% RH (20 to 90% with 739871 AC adapter, non-condensing) |

Revision:

| Items                    |          | Descriptions                                                   |
|--------------------------|----------|----------------------------------------------------------------|
| Environmental conditions | Humidity | 0 to 90% RH (20 to 90% with 739874 AC adapter, non-condensing) |